

Cold Header Die Repair Press


DOCUMENT 12033-A



200 ton CHDR



- Adjustable tonnage
- 12-18" stroke available
- Down-acting ram
- Anti-shrapnel Kevlar rod guard available
- Fast advance/slow pressing speeds
- Self-contained hydraulics
- 480v, 3ph with lockable disconnect
- Easy access dual-powered doors with interlocks
- Guarded wrench opening access
- 18" daylight opening
- Lexan safety viewing windows
- Led worklight

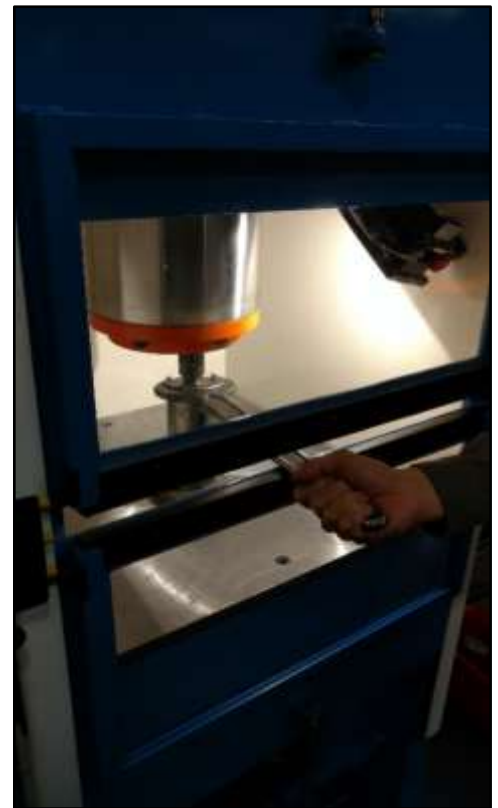

Equipped with easy-access dual-powered doors with ballistics-rated Lexan safety viewing window and interlocks to prevent shrapnel injuries while pressing. Guarded wrench opening access is provided to allow adjustment of taper insert dies.

SAVAGE HYDRAULIC PRESSES ARE APPLICATION-SPECIFIC AND JOB-ENGINEERED
Tonnage, bed size, stroke, daylight openings, and speeds are all customer-selected to meet your exact specifications.



SAVAGE ENGINEERING & SALES, INC.
4855 Chaincraft Road
Garfield Heights, OH 44125

• Phone: 216-587-2885 • Fax: 216-587-0613 • www.savagepress.com • sales@savagepress.com •

metal forming

compression molding

straightening

sheet molding

drawing

assembly

horizontal

compaction

powder compaction

laminating

gluing/bonding

forcing

die repair

blanking

die spotting

special work

composites moldin

bulldozing

trimming

hot press

fluid forming

hobbing

automation